



# TORNADO 600 MD

Uniformity and accuracy in the  
distribution of seeds and fertilizers





# TORNADO 600 MD

Tornado 600 MD is a spreader, ideal for small and medium-sized tractors for applications in small areas. With loading capacity of 600kg, it performs the distribution of fertilizers and seeds in general by throw, such as wheat, oats and millet. The distribution width is up to 16 meters\*.


*\*According to the type of product and application speed.*

Its regulation is precise, allowing the distribution of fodder seeds, even in small quantities.

The gate opens through a lever, facilitating the trimmings in the moment of the application.



**Vazão**

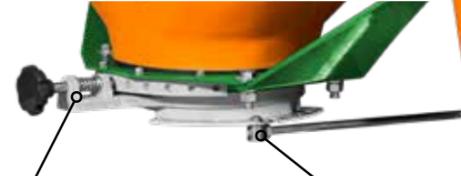

Tornado 600 MD has a maniple for regulating the product flow. It allows the operator to control the flow more to the right, left or center distribution.


The adjustment is accomplished through a doser plate.

## Optional Chinese hat



It protects the seeds, mainly the pre germinated.


## Pinheiro mixer kit

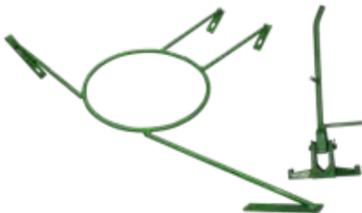

Exclusive for powder products, such as dry limestone, organic fertilizers and wet urea. It maintains the product loose in the tank, so the flow keeps uniform.

## Tank

The polyethylene tank provides protection against corrosive products.

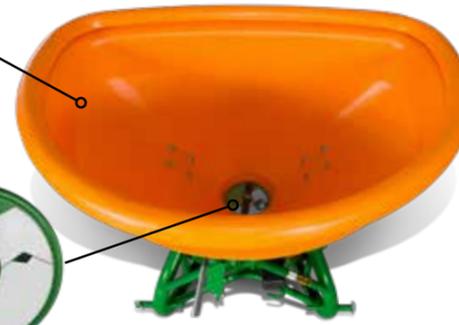

Open gate



Closed gate

## Shaker

Used to facilitate the flow of seeds and granulated fertilizers.



Its circular shape reduces the breaking of products

## Deflector

It allows releasing the product on two tracks, one for each side in relation to the tractor displacement, with adjustable distances ranging from 2 to 8 meters apart, ensuring uniform distribution even on sloping terrain.

## Discs

Distribution discs with four blades and three adjustment options, allowing regulations to different products for application.



The gravity center of the load closer to the tractor allows to work without the need for front weights avoiding toppling



## Technical Specifications

<b>Model</b>	<b>Width</b>
<b>Tornado 600 MD</b>	1.55m
<b>Loading capacity</b>	<b>Height</b>
600kg	1.25m
<b>Working width</b>	<b>Weight</b>
6 to 16m	140kg
<b>Hitch category I and II</b>	<b>Spreading system</b>
Hydraulic system on the 3 <sup>rd</sup> point of the tractor	Single disc
<b>Rotation (PTO)</b>	<b>Flow</b>
540rpm	Varies according to the type of product and application speed.
<b>Length</b>	
1.70m	

The Marketing Department reserves the right to improve and/or modify product features, without prior notice, not assuming any obligation to continue with products previously commercialized. Images merely illustrative

Update: 08/2016  
Printing: 06/12/2018

Ardeing  
(SA) 04543720