



REBOKE 6000 TSI

Agility and practically in the instantaneous seeds treatment






REBOKE 6000 TSI

The Reboke 6000 TSI is an agricultural grain cart which is characterized by performing the seeds treatment instantly at the time of planting, increasing the gains in productivity and profitability to the rural producer.

It has a quick removal polyethylene hopper, facilitating

the maintenance, providing less cost and higher profitability concerning the conventional agricultural grain carts.

The Reboke 6000 TSI chassis pass through a jet blasting process, which eliminates all the rust and residuals, improving paint quality.

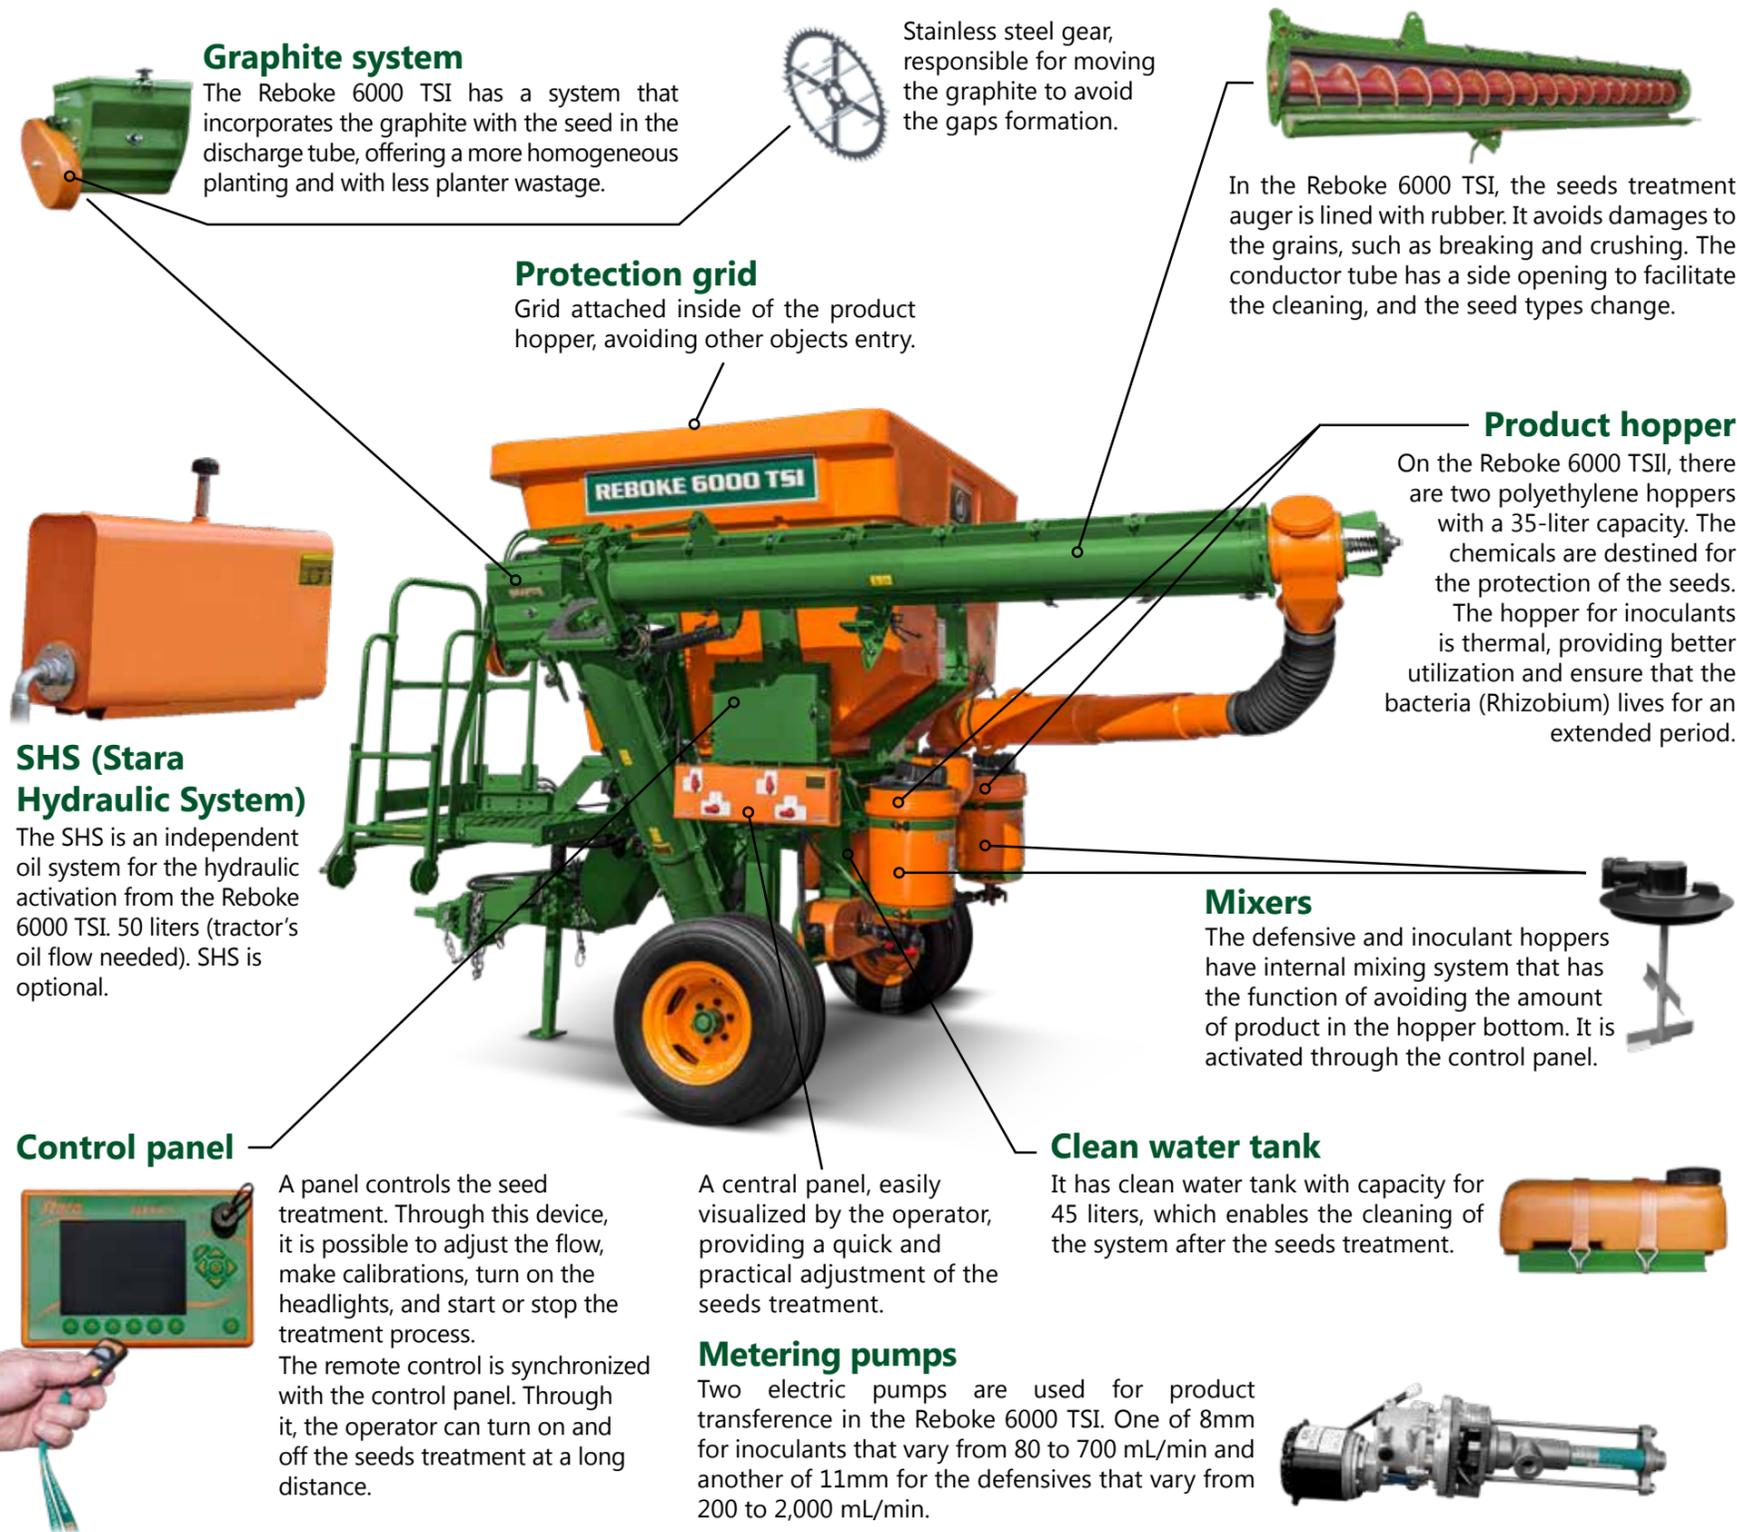

Technical Specifications

Model
Reboke 6000 TSI
Total width with auger
5,275mm
Wheelset external length with auger
3,200mm
Height with closed auger
3,300mm
Height with opened auger
4,230mm
Useful unload height
3,700mm
Seeds treatment capacity
*Up to 150 kg/min
Treatment pumps capacity
35 l each
Treatment types
Inoculants and defensives (liquid)
Inoculant metering range
80 to 700ml
Defensive metering range
200 to 2,000ml
Auger activation system
Motor TE 65 with electro hydraulic control
Treatment system
2 electric dosage pumps
Electric system
Dosage electric system, with keyboard, module and remote control
Tire
7.50" x 16" - 10 ply
Optional
**SHS system
Convoy hitch

*Depending on the type of seed.
**Oil deposit for 110 liters with flow pump for 50 L/min, activated by shaft in the PTO on 540rpm.

The Marketing Department reserves the right to improve and/or modify product features, without prior notice, not assuming any obligation to continue with products previously commercialized. Images merely illustrative.

Update: 02/22/2016
Printing: 07/18/2017

Artelino
CS 3045.3730